

Fiber to Composite Video

Features

- Fiber Optic Input
 - SFP Module Holder
 - SFP Transceiver Module*
- Composite Video Output
 - NTSC, RS-170, or PAL
 - 1 Vpp
 - BNC Connector
 - Line/Audio Output*
- Front Panel LED Status Indicators
 - Fiber Optic Link Status
 - Signal Activity
 - Power
- Selectable Bus Extension
- Pluggable, Hot Swappable
- Remote Control*

*Optional

General Description



The GDP Model 9200-91V1 Data Conversion and Distribution Module is one of the functional and hot-swappable modules which can be incorporated into the 9200 Series Chassis. The 9200-91V1 Module is configured to accept one fiber optic input via an SFP fiber module, and output composite video signal on a BNC connector. A second module, the 9200-V191, can be configured to accept a composite video signal input on a BNC connector, and re-create the fiber optic link as an output via an SFP fiber module.

The Model 9200 Data Conversion and Distribution System is a modular product that is scalable and user configured to convert and/or distribute a large selection of data channels to satisfy a wide variety of data signal conversion and distribution functions. The 9200 chassis has 16 single height card slots to house the large selection of 9200 series modules. The 9200 series modules provide the ability to accept and properly terminate a variety of signal types and then convert these signals to other industry standards.

The chassis provides global and daisy chain buses so that signals can be received by one module and then sent to other modules in the chassis to satisfy signal conversion and distribution requirements. This concept provides a cost effective and flexible solution to a wide range of signal conversion and distribution applications such as level conversion, signal inversion, code conversion, time code distribution, fiber optic transport, and optical isolation.

Figure 1 shows a functional block diagram of the Model 9200-91V1.

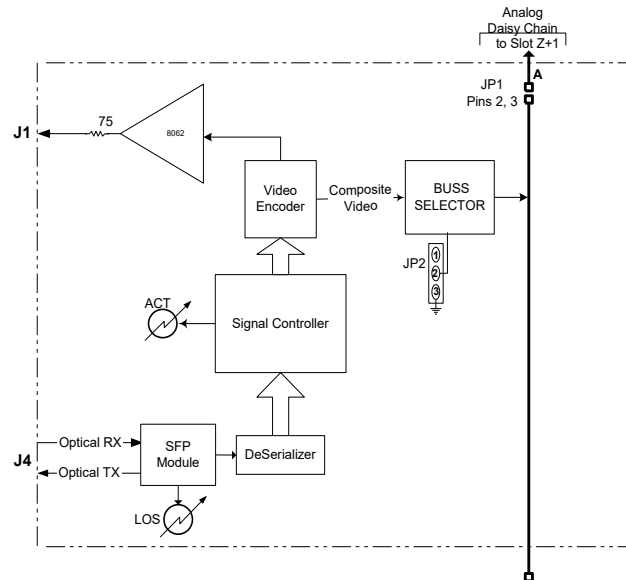


Figure 1: 9200-91V1 Module Functional Block Diagram

Specifications

ELECTRICAL

- Video Input, Fiber Optic, J4
 - SFP Module Holder
 - SFP Transceiver Module (Optional)
- Composite Video Output, BNC, J1
 - NTSC, RS-170, or PAL
 - 1 Vpp, 75 Ohm , Operates to 30 MHz
 - Select Composite Video-to Analog Bus
 - Line/Audio Output (Option), J2/J3
- LED Status Indicators
 - ACT (Green): Signal Input Present
 - LOS (Tri-Color):
 - (Red): No Optical Link
 - (Green): Optical Link Up
 - (Amber): Tx (Local) Laser Off
 - P (Blue): Power OK
- Selectable Bus Extension
- Remote Control (Option)
 - Requires 9200-HSC1 System Option

MECHANICAL

- 2.9”(w) x 0.75”(h) x 7.1”(d)
- Hot Swappable
 - Pluggable w/Card Edge Connector
 - Card-Lock/Extraction Handle

ENVIRONMENTAL

- Operating
 - Temp: 0 to +55 degrees C
 - Relative Humidity: 5% to 95% non-cond
- Non-operating (Storage)
 - Temp: -40 to +85 degrees C
 - Relative Humidity: 5% to 95% non-cond

* Recognizing that no standard product can meet all the needs of all users, GDP stands ready to provide units tailored to unique applications.

* The statements in this data sheet are not intended to create any warranty, expressed or implied. Specifications are subject to change without notice.